

Hook blocks with special features **Electromechanically operated safety catch**




- Operation is possible in all hook positions and during the rotation movement
- Can be integrated into all sizes and types of hook block

Hook safety catches are fundamentally required in accordance with the UVV (Accident Prevention Regulation). However, it often causes considerable difficulties or may even pose a risk to the person attaching the load if the safety catches are operated during hooking and unhooking of the load or the load handling attachment.

The electromagnetic safety catch makes this working process significantly easier and faster. It is operated by means of a rod located in a central feedthrough. The drive is manufactured in such a way that it cannot be overloaded.

This solution is protected by patent law.

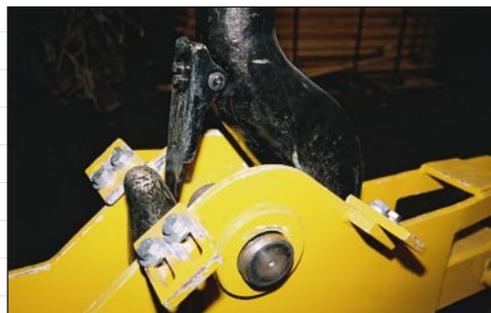

MCD Maschinentechnik
Uwe Richter
Hansestraße 6
37574 Einbeck - Germany

Tel. +49.(0)5561. 924 017
Fax +49.(0)5561. 924 018
info@mcd-tec.de
www.mcd-tec.de